


HOW TO FIT SIGNATURE STORAGE

Assembly Instruction

TOOLS REQUIRED:

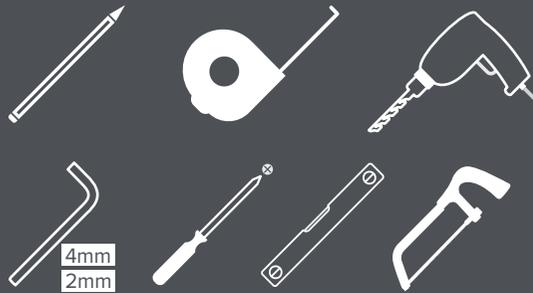

! Please check your opening for any hidden electrical wires and water pipes before / screwing.




⊘ Screws not supplied. Use suitable screws and plugs.


SIGNATURE
BY SPACESLIDE

V1


CUTTING/ADJUSTING THE STANCHIONS FOR YOUR OPEN HEIGHT

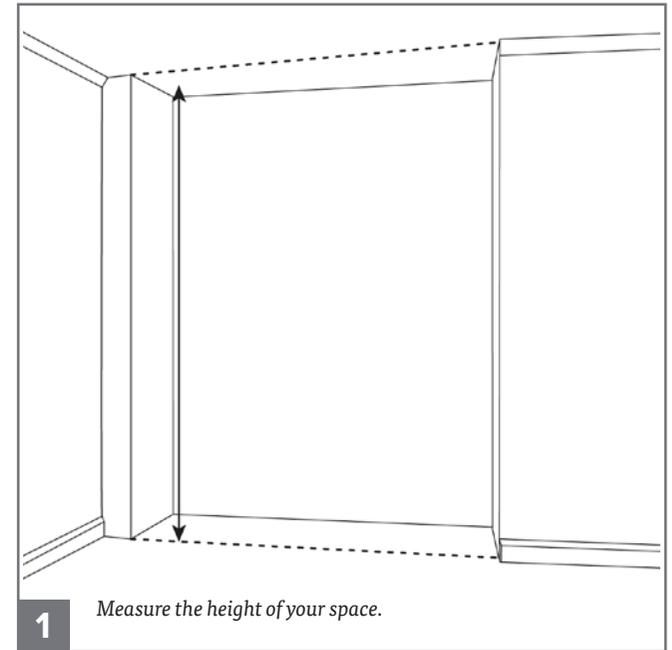


1 Measure the height of your space.

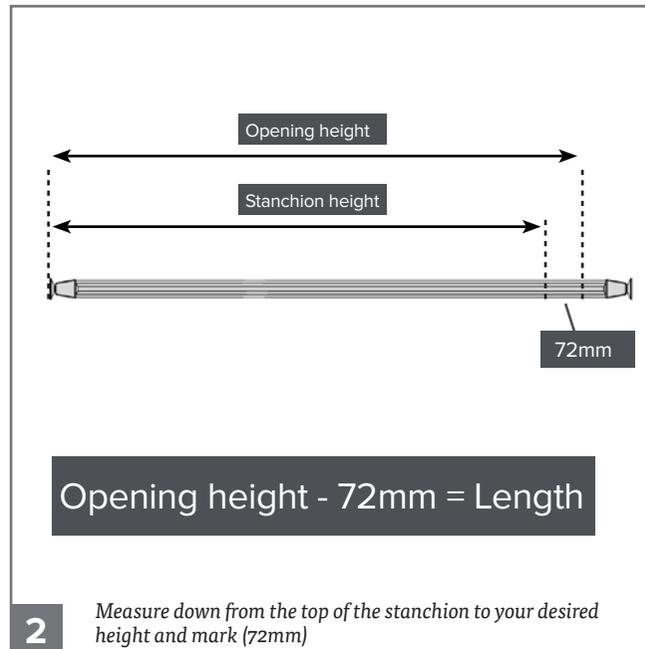

2 Measure down from the top of the stanchion to your desired height and mark (72mm)

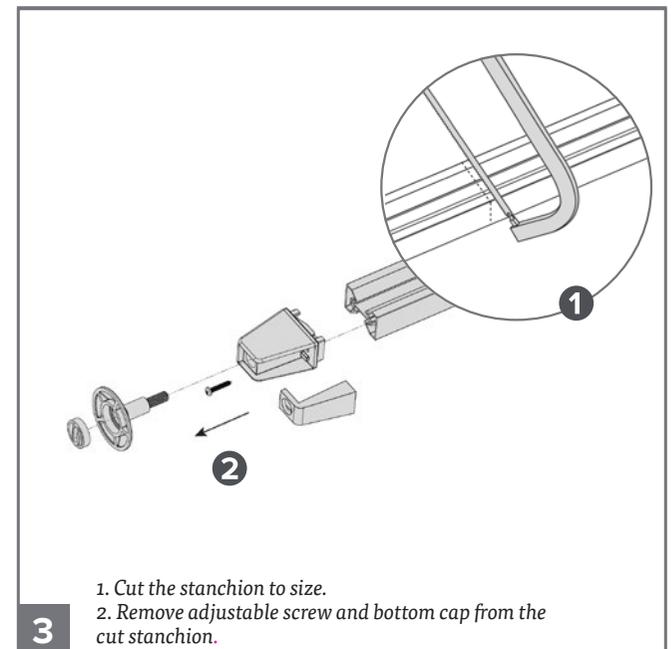


3 1. Cut the stanchion to size.
2. Remove adjustable screw and bottom cap from the cut stanchion.

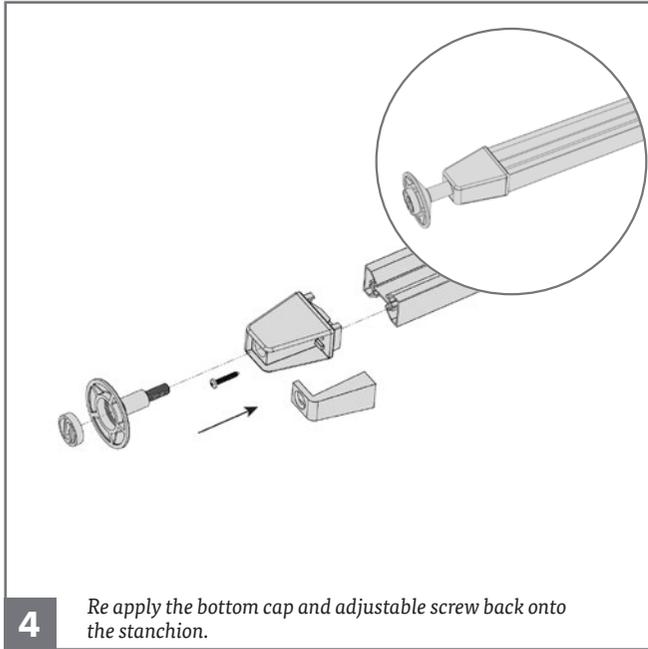


4 Re apply the bottom cap and adjustable screw back onto the stanchion.


FITTING THE STANCHIONS

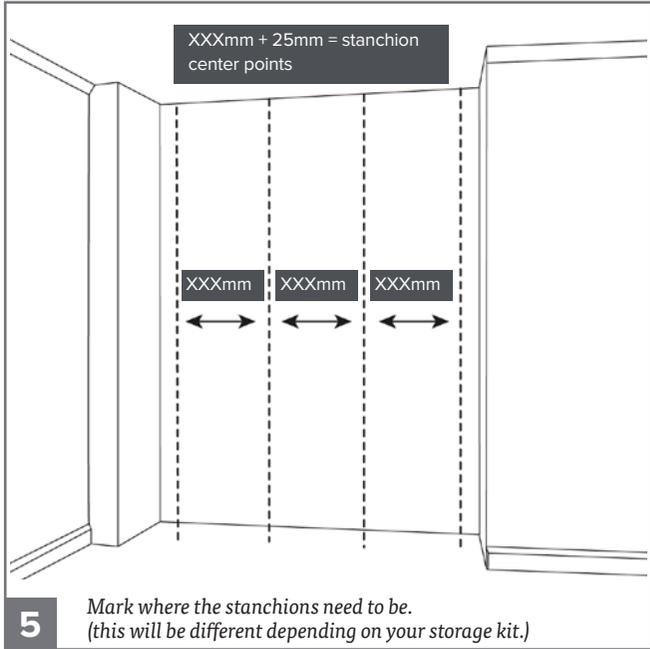

5 Mark where the stanchions need to be. (this will be different depending on your storage kit.)

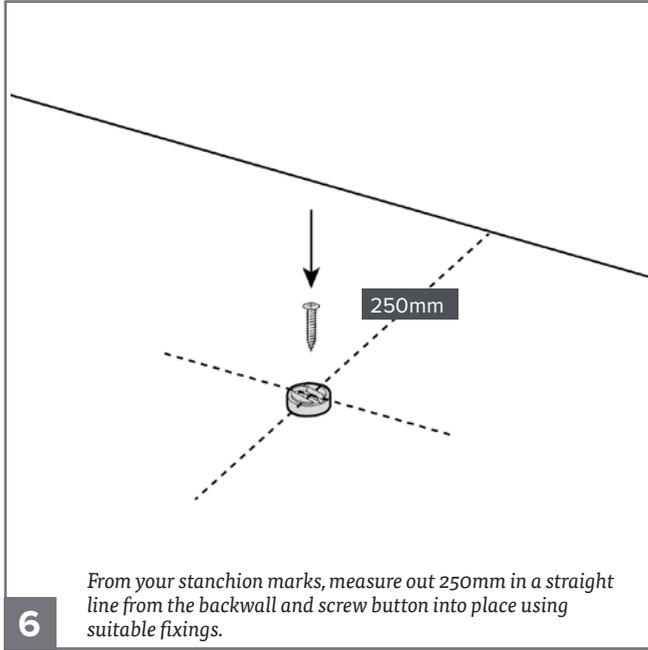


6 From your stanchion marks, measure out 250mm in a straight line from the backwall and screw button into place using suitable fixings.

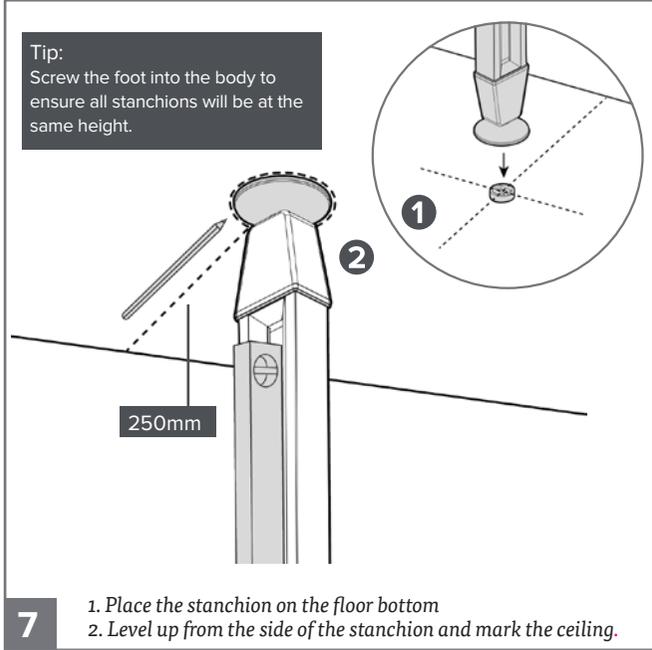


Tip:
Screw the foot into the body to ensure all stanchions will be at the same height.





7 1. Place the stanchion on the floor bottom
2. Level up from the side of the stanchion and mark the ceiling.

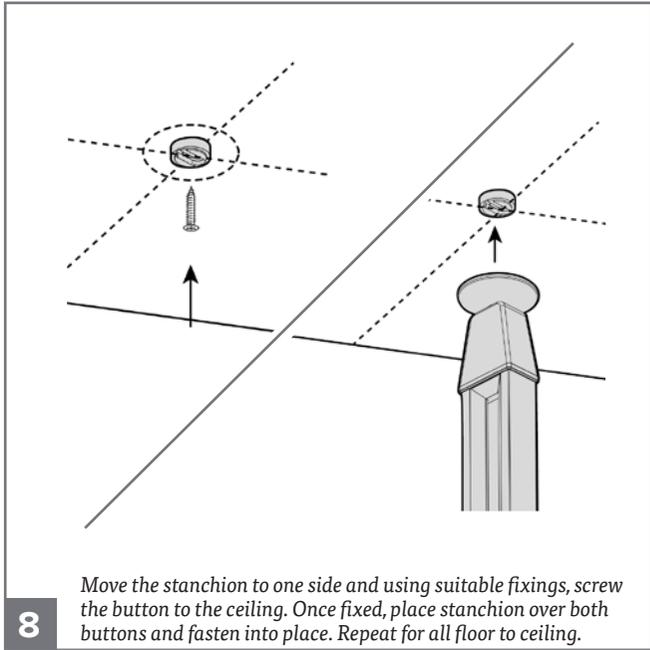






8 Move the stanchion to one side and using suitable fixings, screw the button to the ceiling. Once fixed, place stanchion over both buttons and fasten into place. Repeat for all floor to ceiling.

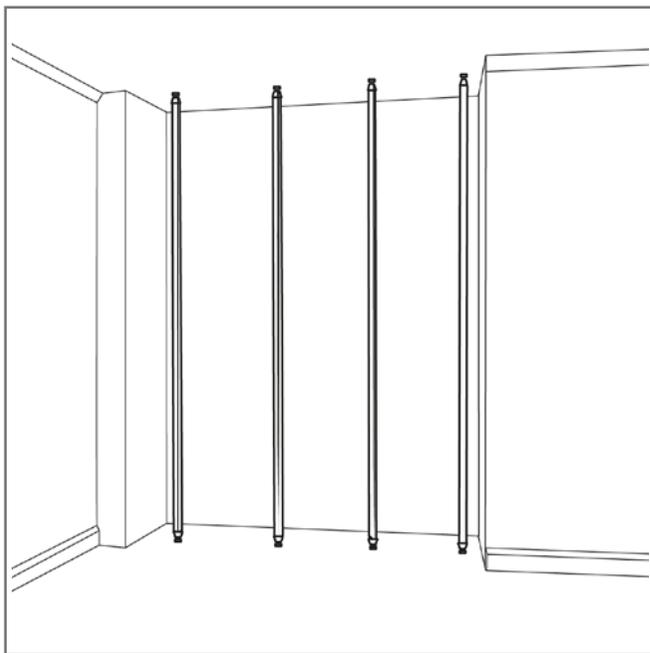






FITTING THE HANGER BARS

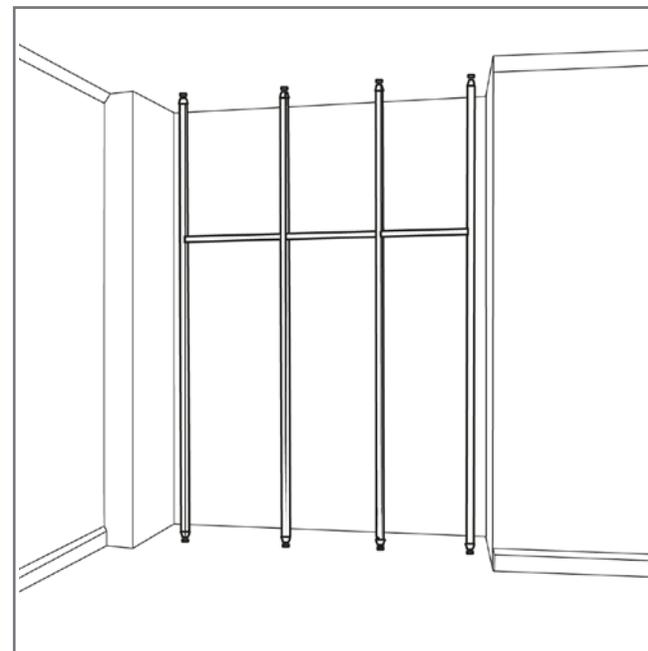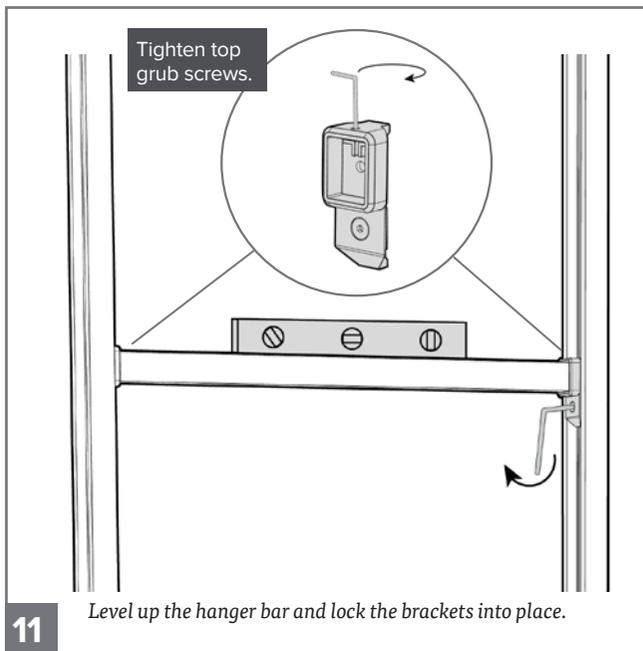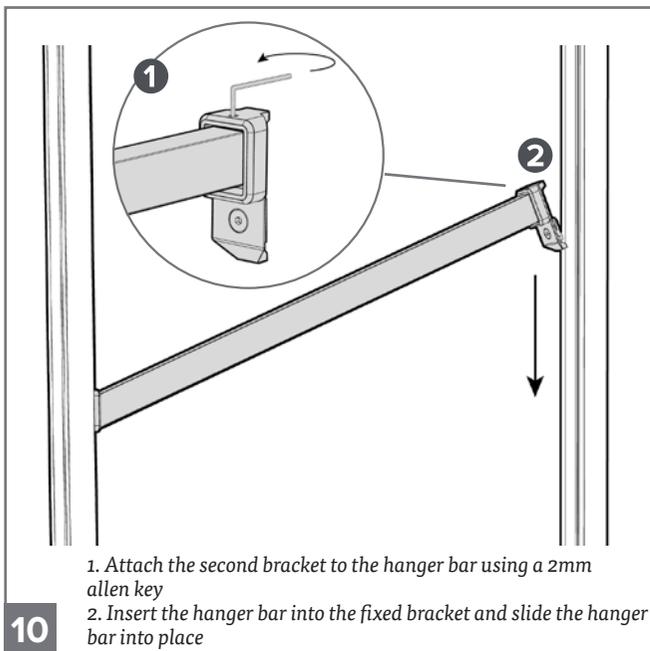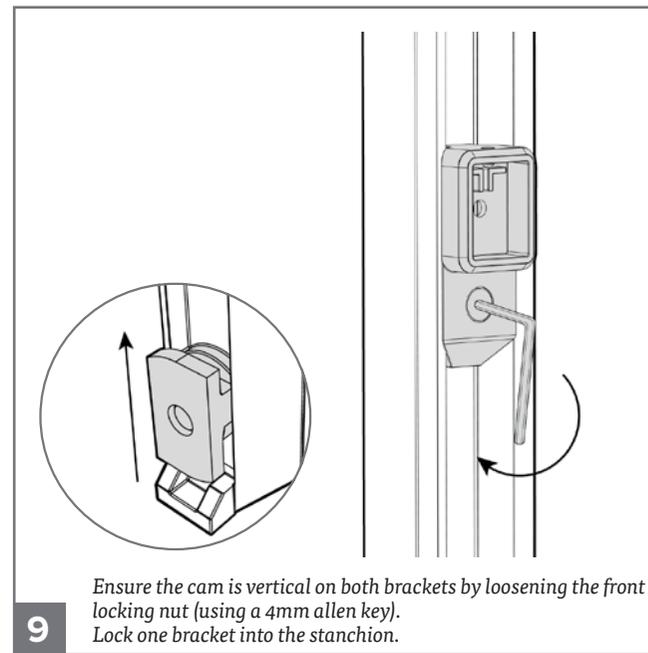


FITTING THE SHELVES

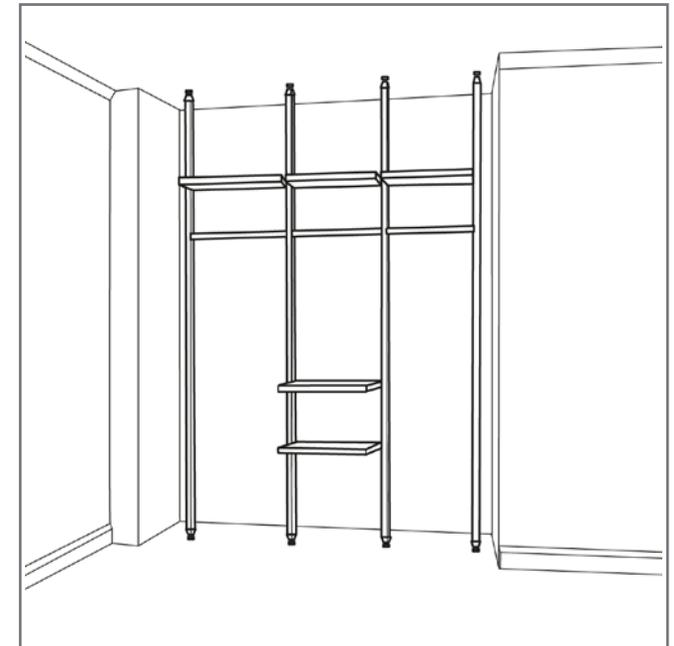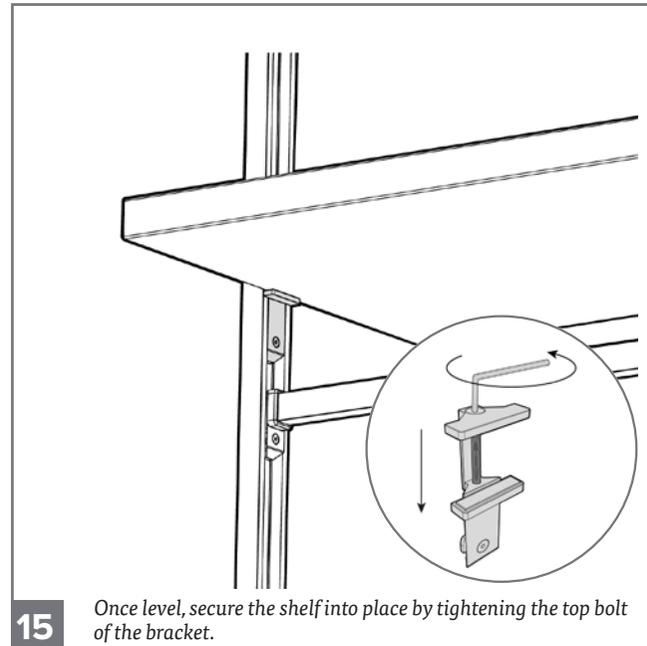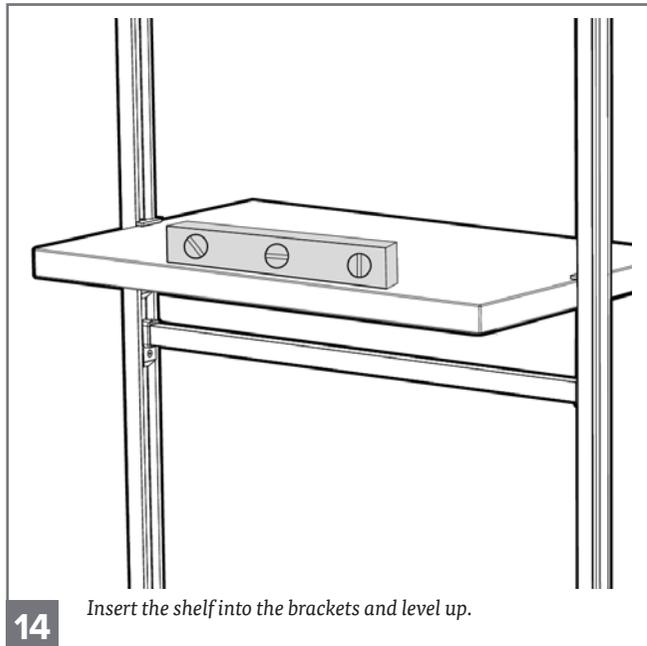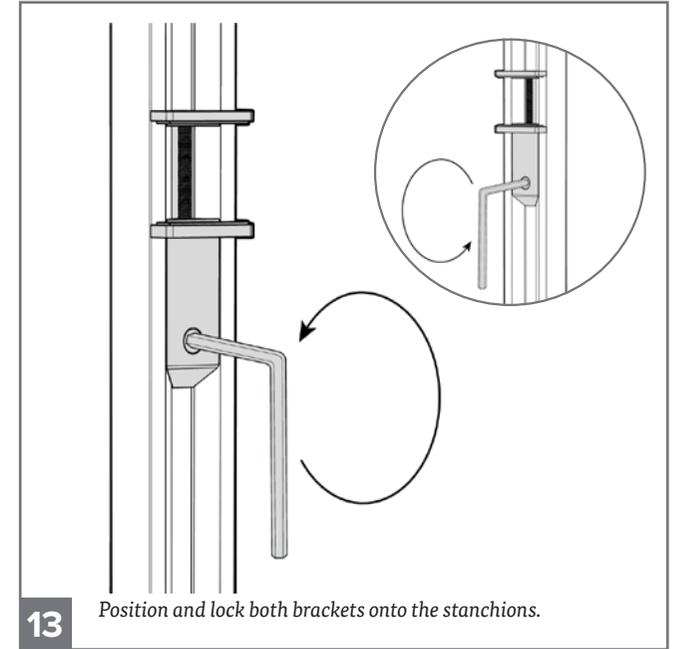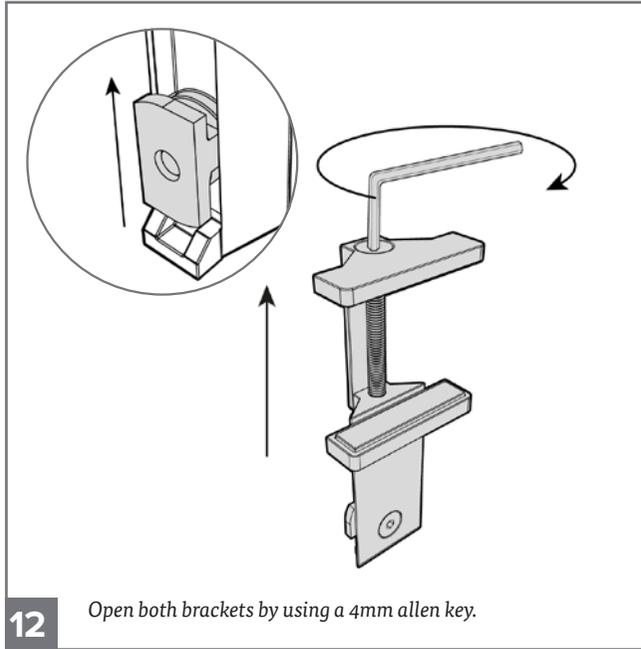



FITTING THE DRAWER UNITS

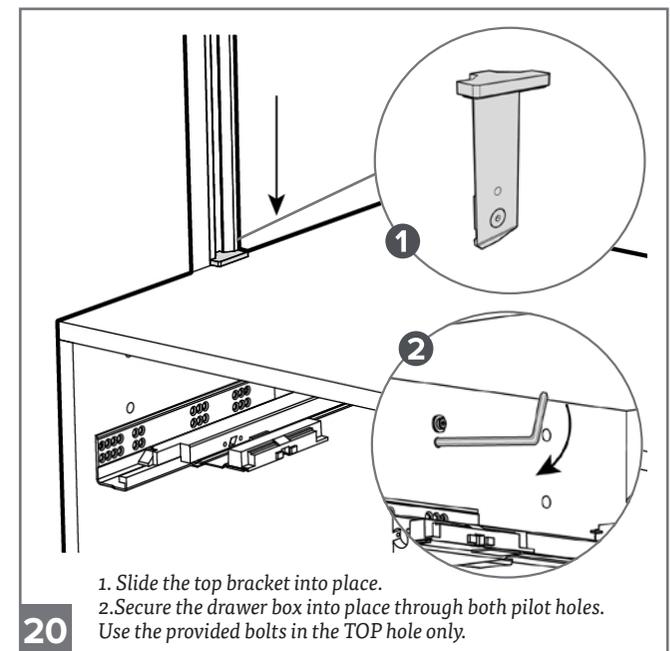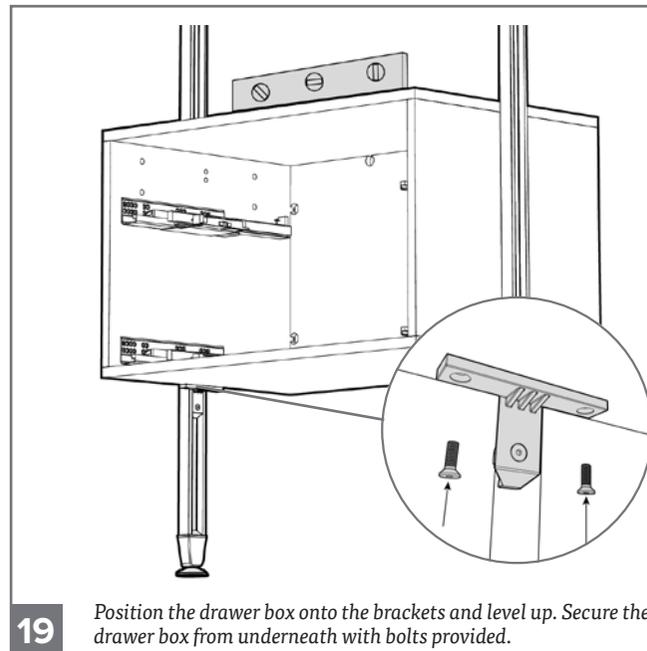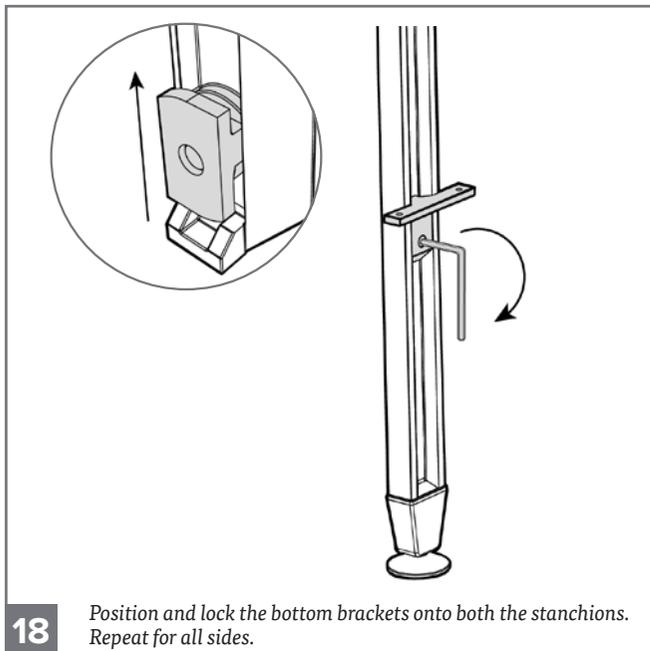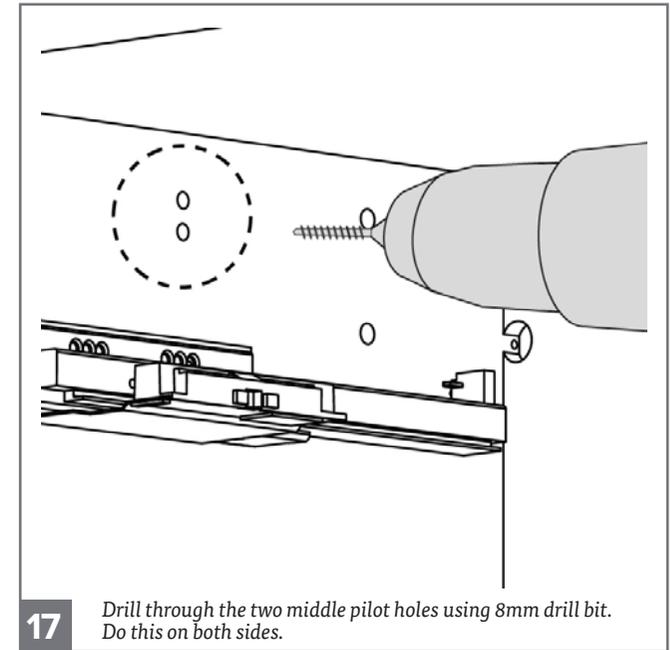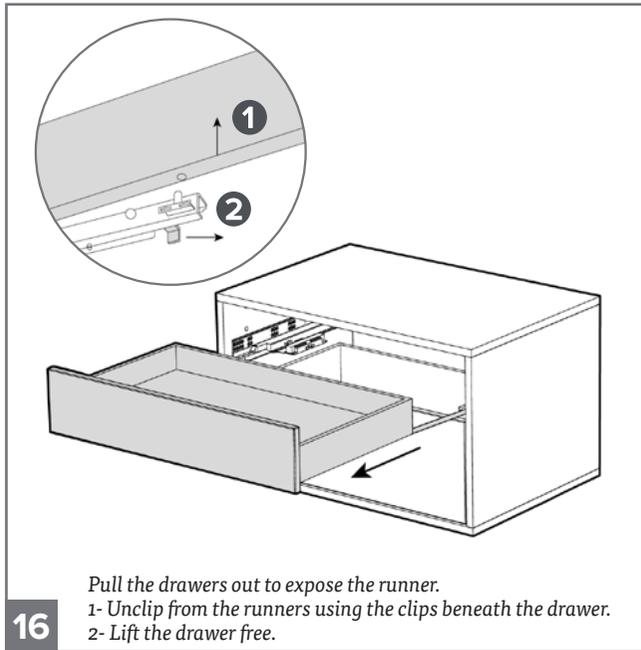


FITTING THE SHOE RACKS

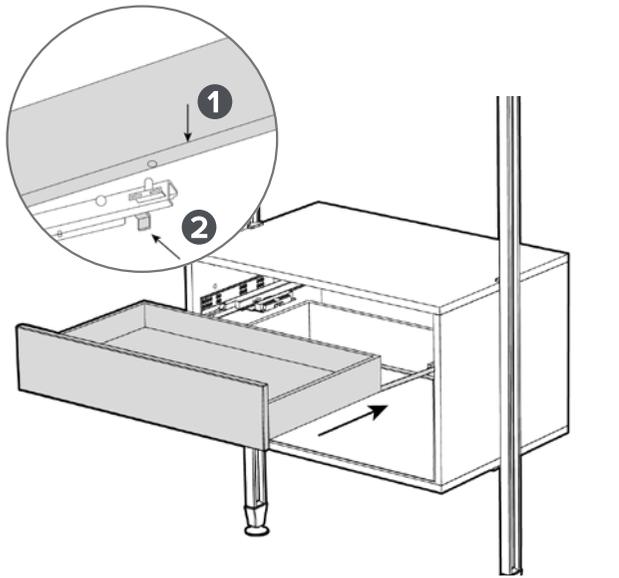

21 1. Place the drawer box back onto the runner. 2. Secure the drawer box onto the runner using the clips. Repeat on both drawers.

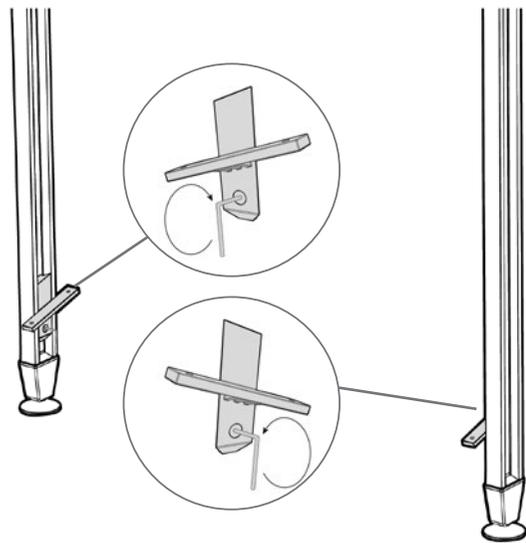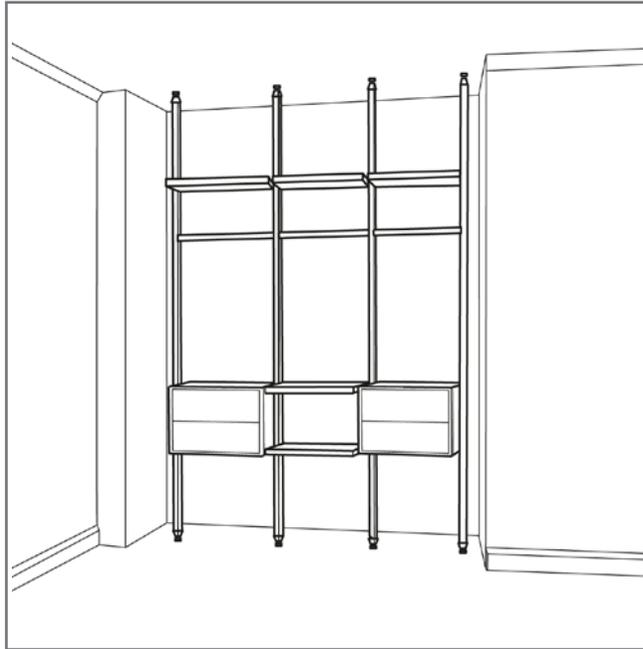

22 Position both brackets onto the stanchions and lock into position using a 4mm allen key. The brackets should slope to the front.

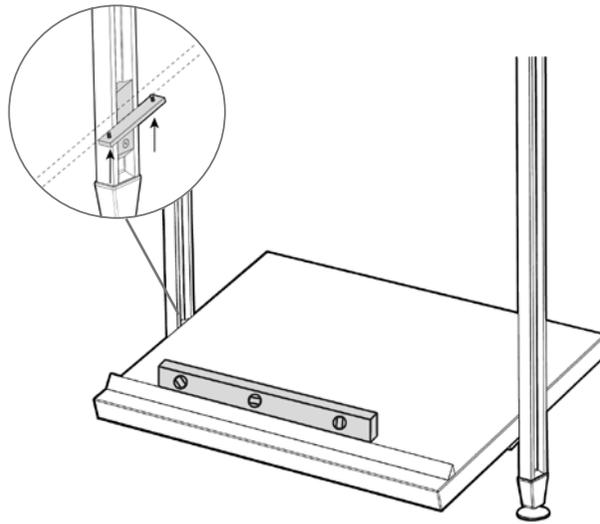

23 Position the shoe rack onto the brackets and level up. Once level secure the shoe rack into position by using the bolts supplied. (You will require a 4mm allen key.)

